

## Features & Benefits

- Adhesion to a wide variety of substrates
- Fast cure at room temperature
- No mix application
- High shear and peel strength
- Good impact strength
- Good chemical resistance

## Description

**PERMABOND<sup>®</sup> TA440** is a two component structural acrylic adhesive suitable for bonding metals, glass, wood, ferrites, ceramics and some rigid plastics. This adhesive may be used in a variety of structural bonding applications due to its versatile performance capabilities.

**Permabond TA440** provides high strength while maintaining excellent flexibility, resulting in tough, durable bonds with outstanding impact and peel resistance. Handling strength is achieved in a few minutes at room temperature.

## Physical Properties of Uncured Adhesive

	TA440 A	TA440 B
Chemical composition	Urethane methacrylate	Urethane methacrylate
Colour	Amber	Green
Mixed colour	Green	
Viscosity @ 25°C	20 rpm: 5,000-12,000 mPa.s (cP)	20 rpm: 5,000-12,000 mPa.s (cP)
Specific gravity	1.1	1.1

## Typical Curing Properties


Ratio of use	1 : 1
Maximum gap fill	0.5 mm (0.02 in)
Fixture time (zinc) @23°C	No gap: 15-30 seconds
Handling time (zinc) (0.3 N/mm <sup>2</sup> shear strength is achieved) @23°C	No gap: 60-90 seconds
Working strength (zinc) @23°C	No gap: 30-60 minutes
Full cure @23°C	24 hours

## Typical Performance of Cured Adhesive

Shear strength (ISO4587)*	Mild steel: 15-25 N/mm <sup>2</sup> (2200-3600 psi) Zinc: 10-15 N/mm <sup>2</sup> (1450-2200 psi)
Peel strength (ISO 4578)	45-65 N/25mm (10-14 PIW)
Tensile strength (ISO37)	25N/mm <sup>2</sup> (3600 psi)
Impact strength (ASTM D-950)	10-15 kJ/m <sup>2</sup>
Coefficient of thermal expansion (ASTM D-696)	80 x 10 <sup>-6</sup> 1/K
Thermal conductivity (ASTM C-177)	0.1 W/(m.K)
Dielectric constant (ASTM D-150)	4.6 MHz
Dielectric strength (ASTM D-149)	30-50 kVmm
Volume resistivity (ASTM D-257)	2 x 10 <sup>13</sup> Ohm.cm

\*Strength results will vary depending on the level of surface preparation and gap.


## Strength Development

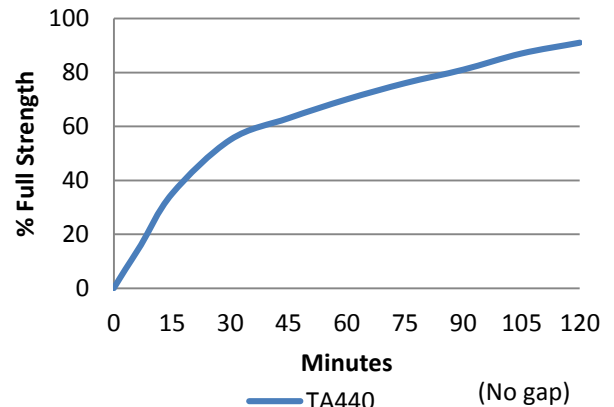

Graph shows typical strength development of bonded components at 23°C. An increase of 8°C in temperature will halve the cure time. Lower temperatures will result in a slower cure time.

The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association's Responsible Care<sup>®</sup> program.

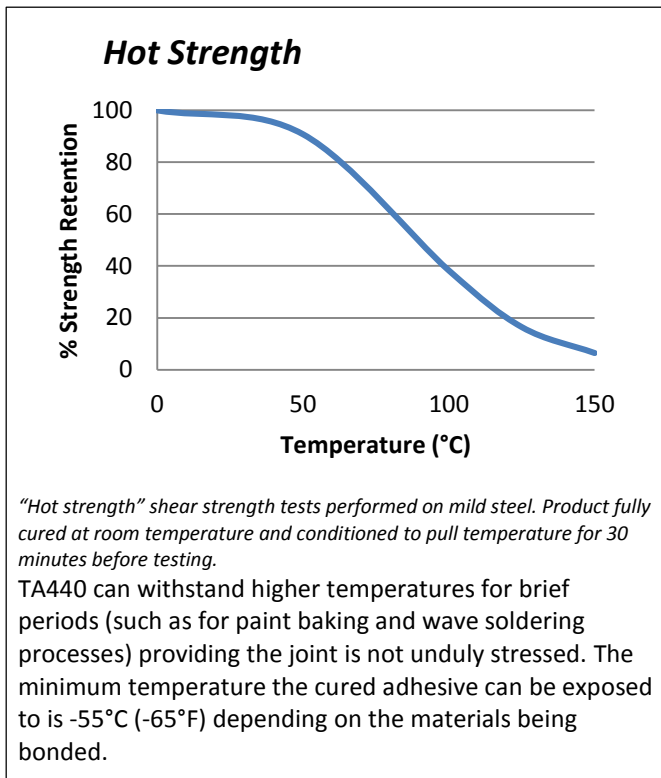

### Directions for Use

- 1) Surfaces must be clean, dry and grease-free prior to bonding.
- 2) Apply TA440A to one surface and TA440B to the other.
- 3) Alternatively, dispense ‘bead-on-bead’ (one bead on top of the other) and then assemble parts.
- 4) Applying adhesive side by side is not advisable as this may not achieve adequate mixing.
- 5) Maintain pressure until handling strength is achieved. The time required will vary according to the joint design and surfaces being bonded.
- 6) Allow 24 hours for adhesive to fully cure. Accelerated cure times may be achieved by heating.

### Storage & Handling

Storage Temperature	5 to 25°C (41 to 77°F)
---------------------	------------------------

### Additional Information

This product is not recommended for use in contact with strong oxidizing materials. This product may affect some thermoplastics and users must check compatibility of the product with such substrates.

Information regarding the safe handling of this material may be obtained from the Safety Data Sheet.

Users are reminded that all materials, whether innocuous or not, should be handled in accordance with the principles of good industrial hygiene.

### Surface Preparation

Surfaces should be clean, dry and grease-free before applying the adhesive. Permabond Cleaner A is recommended for the degreasing of most surfaces. Some metals such as aluminium, copper and its alloys will benefit from light abrasion with emery cloth (or similar), to remove the oxide layer.

### Contact Permabond:

- Americas +1 732 868 1372
- US 800-640-7599
- Asia + 86 21 5773 4913
- Europe +44 (0) 1962 711661
- UK 0800 975 9800
- Deutschland 0800 111 388
- France 0805 111 388

[info.americas@permabond.com](mailto:info.americas@permabond.com)

[info.europe@permabond.com](mailto:info.europe@permabond.com)

[info.asia@permabond.com](mailto:info.asia@permabond.com)

The information given and the recommendations made herein are based on our research and are believed to be accurate but no guarantee of their accuracy is made. In every case we urge and recommend that purchasers before using any product in full-scale production make their own tests to determine to their own satisfaction whether the product is of acceptable quality and is suitable for their particular purpose under their own operating conditions. THE PRODUCTS DISCLOSED HEREIN ARE SOLD WITHOUT ANY WARRANTY AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED.

No representative of ours has any authority to waive or change the foregoing provisions but, subject to such provisions, our engineers are available to assist purchasers in adapting our products to their needs and to the circumstances prevailing in their business. Nothing contained herein shall be construed to imply the non-existence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of this patent. We also expect purchasers to use our products in accordance with the guiding principles of the Chemical Manufacturers Association’s Responsible Care® program.